


Dual NPN+PNP Small Signal Transistor

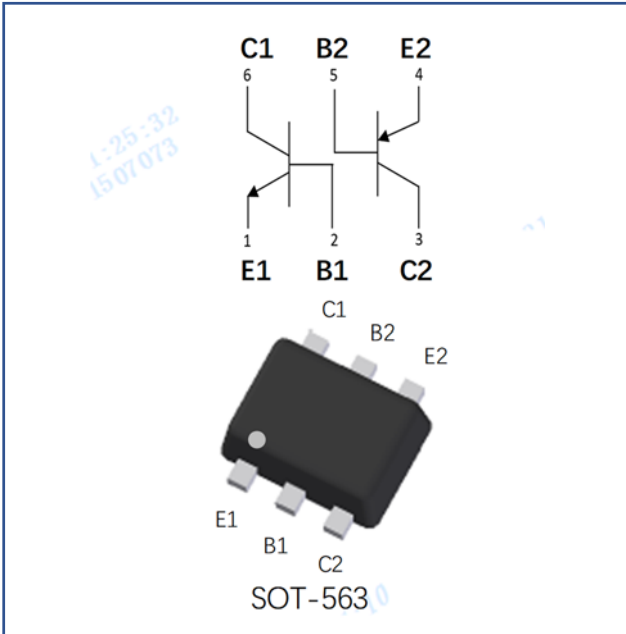

Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

TR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				K46
Collector-base voltage	V_{CBO}	V	$I_C=10\mu\text{A}, I_E=0$	60
Collector-emitter voltage	V_{CEO}	V	$I_C=1\text{mA}, I_B=0$	40
Emitter-base voltage	V_{EBO}	V	$I_E=10\mu\text{A}, I_C=0$	6
Collector current	I_C	mA		200
Power dissipation	P_D	mW		150
Junction temperature	T_J	$^\circ\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^\circ\text{C}$		-55 to +150



MMDT3946V

RoHS
COMPLIANT

TR2-PNP

Item	Symbol	Unit	Conditions	Value
Collector-base voltage	V_{CBO}	V	$I_C=-10\mu A, I_E=0$	-40
Collector-emitter voltage	V_{CEO}	V	$I_C=-1mA, I_B=0$	-40
Emitter-base voltage	V_{EBO}	V	$I_E=-10\mu A, I_C=0$	-5
Collector current	I_C	mA		-200
Power dissipation	P_D	mW		150
Junction temperature	T_J	°C		-55 to +150
Storage temperature	T_{STG}	°C		-55 to +150

■ Electrical Characteristics ($T_a=25^\circ C$ Unless otherwise specified)

TR1-NPN

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C=10\mu A, I_E=0$	60		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C=1mA, I_B=0$	40		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E=10\mu A, I_C=0$	6		
Collector cut-off current	I_{CBO}	nA	$V_{CB}=30V, I_E=0$			50
Collector cut-off current	I_{CEO}	nA	$V_{CE}=30V, I_B=0$			50
Collector cut-off current	I_{EBO}	nA	$V_{EB}=5V, I_C=0$			50
DC current gain	h_{FE1}		$V_{CE}=1V, I_C=0.1mA$	40		
	h_{FE2}		$V_{CE}=1V, I_C=1mA$	70		
	h_{FE3}		$V_{CE}=1V, I_C=10mA$	100		300
	h_{FE4}		$V_{CE}=1V, I_C=50mA$	60		
	h_{FE5}		$V_{CE}=1V, I_C=100mA$	30		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C=10mA, I_B=1mA$			0.2
	$V_{CE(sat)2}$	V	$I_C=50mA, I_B=5mA$			0.3
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C=10mA, I_B=1mA$	0.65		0.85
	$V_{BE(sat)2}$	V	$I_C=50mA, I_B=5mA$			0.95
Collector-base Output Capacitance	C_{ob}	pF	$V_{CB}=5.0V, f=1.0MHz, I_E=0$			4



MMDT3946V

RoHS
COMPLIANT

Item	Symbol	Unit	Conditions	Min	Typ	Max
Transition frequency	f_T	MHz	$V_{CE}=20V, I_C=20mA, f=100MHz$	300		
Delay time	t_d	ns	$V_{CC}=3V, I_C=10mA, V_{BE}=0.5V,$ $I_{B1}=1mA$			35
Rise time	t_r	ns				35
Storage time	t_s	ns	$V_{CC}=3V, I_C=10mA, I_{B1}=-I_{B2}=1mA$			200
Fall time	t_f	ns				50

TR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C=-10\mu A, I_E=0$	-40		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C=-1mA, I_B=0$	-40		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E=-10\mu A, I_C=0$	-5		
Collector-base cut-off current	I_{CBO}	nA	$V_{CB}=-30V, I_E=0$			-50
Emitter-base cut-off current	I_{EBO}	nA	$V_{EB}=-5V, I_C=0$			-50
DC current gain	h_{FE1}		$V_{CE}=-1V, I_C=-0.1mA$	40		
	h_{FE2}		$V_{CE}=-1V, I_C=-1mA$	70		
	h_{FE3}		$V_{CE}=-1V, I_C=-10mA$	100		300
	h_{FE4}		$V_{CE}=-1V, I_C=-50mA$	60		
	h_{FE5}		$V_{CE}=-1V, I_C=-100mA$	30		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C=-10mA, I_B=-1mA$			-0.25
	$V_{CE(sat)2}$	V	$I_C=-50mA, I_B=-5mA$			-0.4
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C=-10mA, I_B=-1mA$	-0.65		-0.85
	$V_{BE(sat)2}$	V	$I_C=-50mA, I_B=-5mA$			-0.95
Collector-base Output Capacitance	C_{ob}	pF	$V_{CB}=-5.0V_{dc}, f=1.0MHz, I_E=0$			4.5
Transition frequency	f_T	MHz	$V_{CE}=-20V, I_C=-10mA, f=100MHz$	250		
Delay time	t_d	ns	$V_{CC}=-3V, I_C=-10mA,$ $V_{BE}=-0.5V, I_{B1}=-1mA$			35
Rise time	t_r	ns				35
Storage time	t_s	ns	$V_{CC}=-3V, I_C=-10mA,$ $I_{B1}=-I_{B2}=-1mA$			225
Fall time	t_f	ns				75



■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}C/W$	833
Thermal resistance, junction-to-case	$R_{\theta J-C}^{(1)}$	$^{\circ}C/W$	667

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

■ Characteristics

TR1-NPN

Fig 1: Static Characteristics

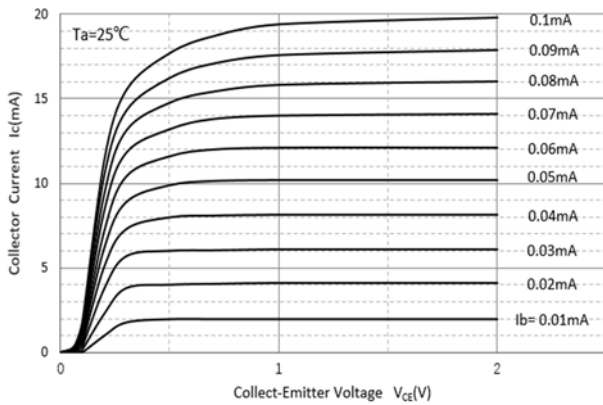


Fig 2: DC Current Gain

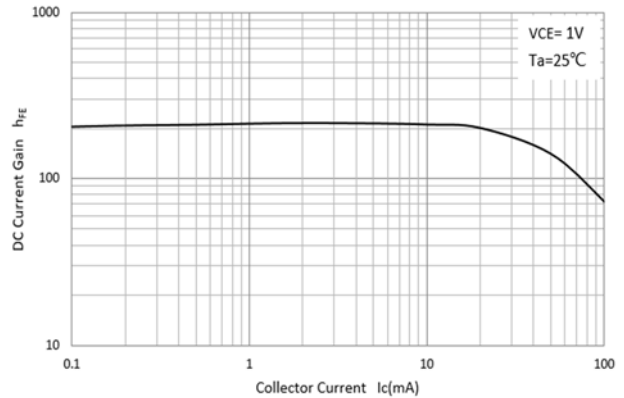


Fig 3: Collector-Emitter Saturation Voltage


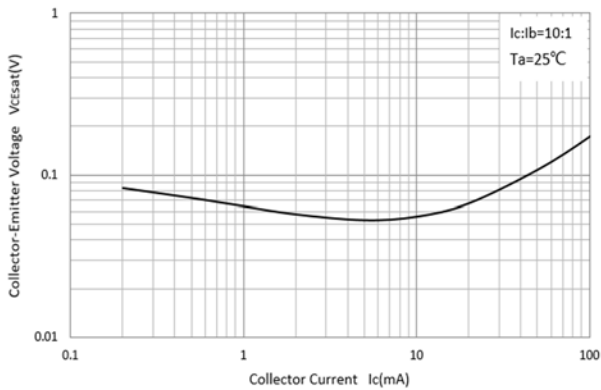


Fig 4: Base-Emitter Saturation Voltage



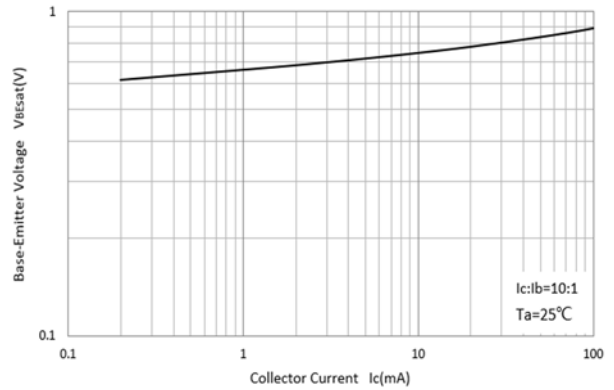

MMDT3946V

RoHS
COMPLIANT

Fig 5: Base-Emitter On Voltage

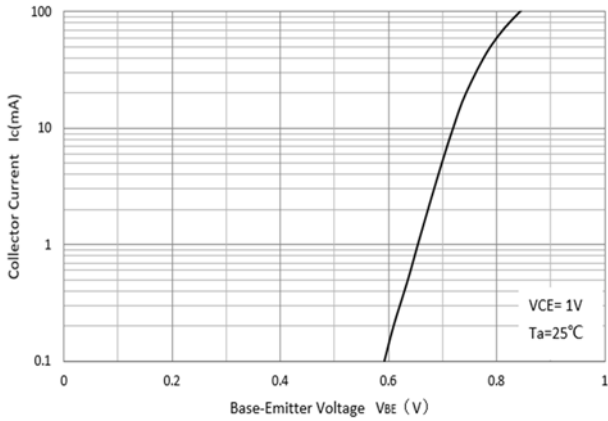


Fig 6: Cob/Cib-V_{CB}/V_{EB}


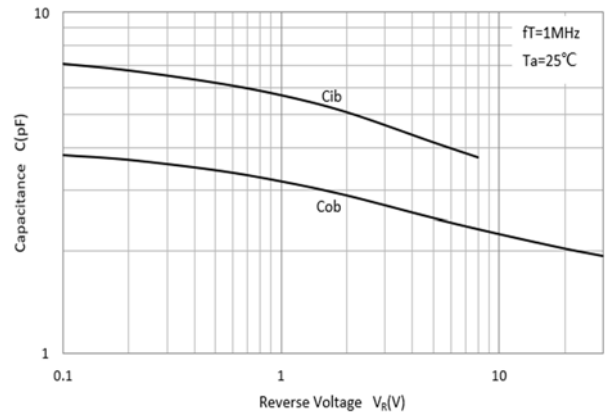


Fig 7: P_D-T_a Curve

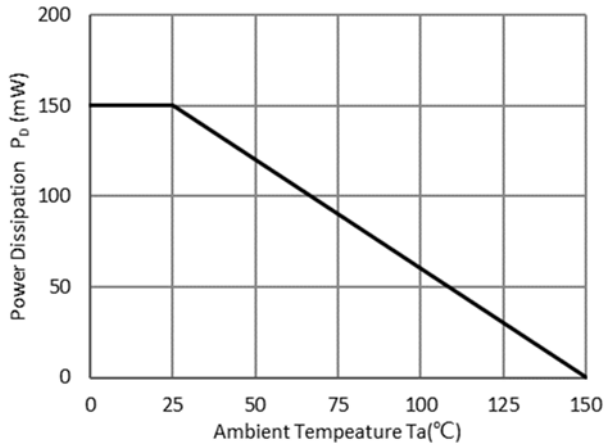

TR2-PNP

Fig 1: Static Characteristics


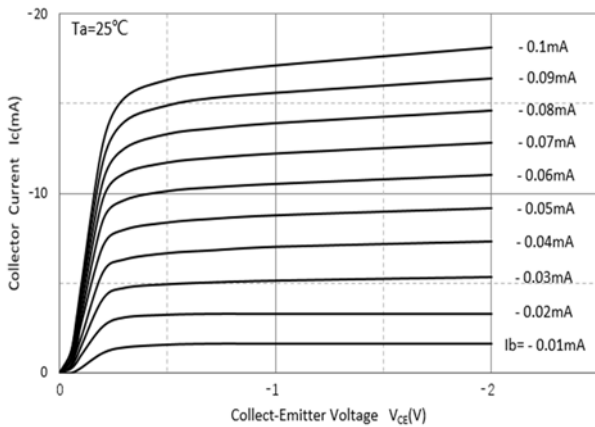


Fig 2: DC Current Gain



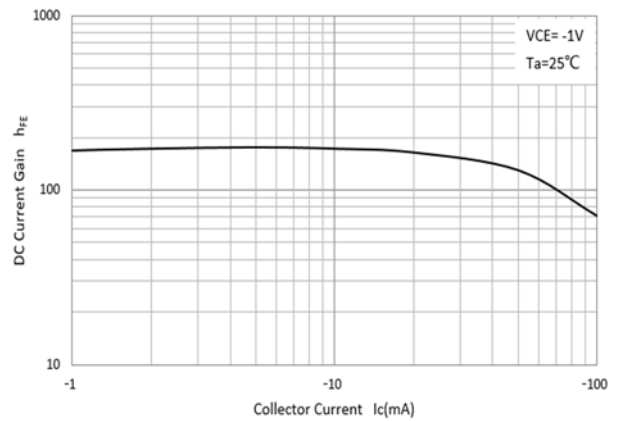

MMDT3946V

RoHS
COMPLIANT

Fig 3: Collector-Emitter Saturation Voltage

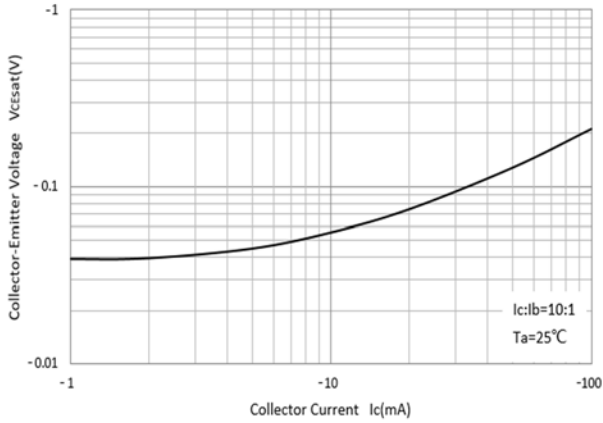


Fig 4: Base-Emitter Saturation Voltage

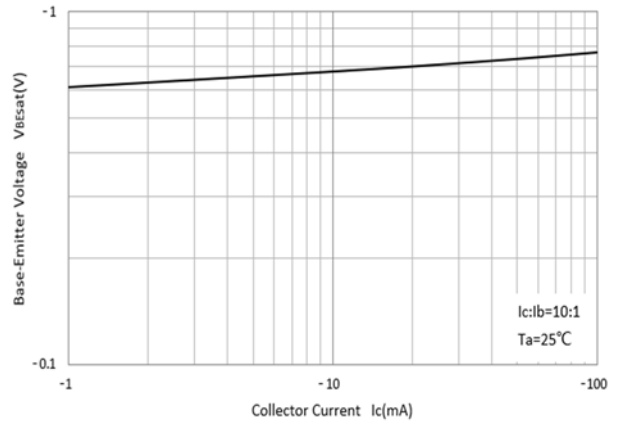


Fig 5: Base-Emitter Voltage

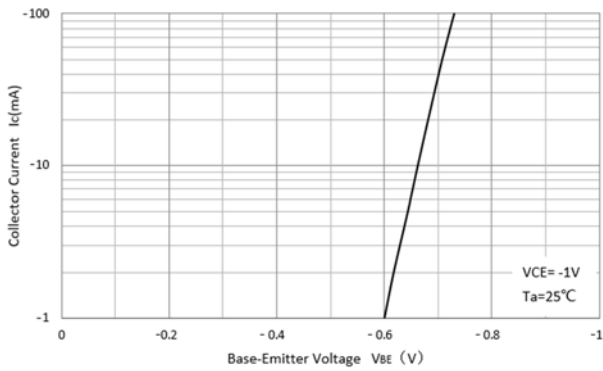


Fig 6: $C_{ob}/C_{ib}-V_{CB}/V_{EB}$


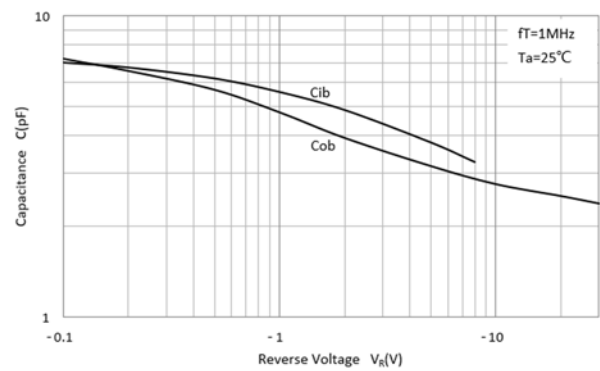


Fig 7: P_D - T_a Curve



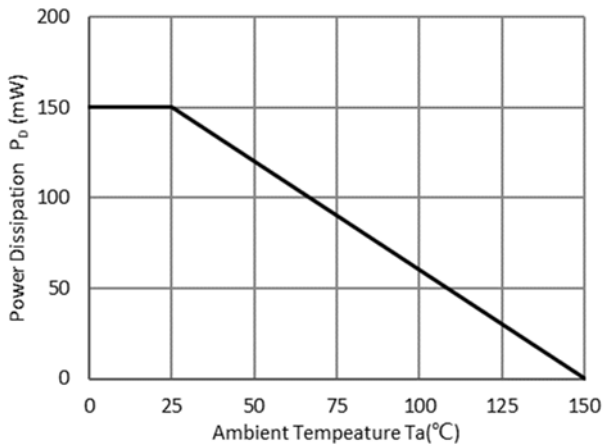

MMDT3946V


RoHS
COMPLIANT

Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
MMDT3946V	F2	Approximate 0.0035	3000	30000	120000	7" reel

Outline Dimensions


SOT-563

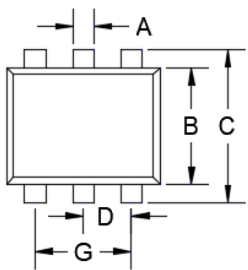

TOP VIEW




SIDE VIEW



SIDE VIEW

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MM	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

Suggested Pad Layout

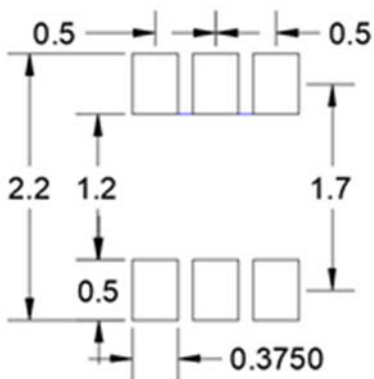

UNIT:mm



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.