
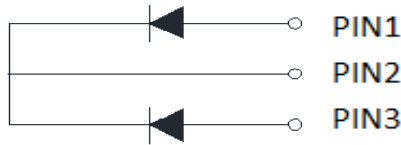


Schottky Diodes

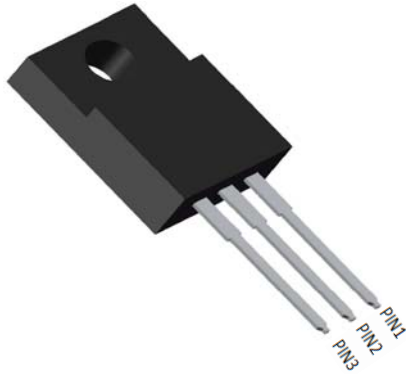

Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** ITO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRL2045FCT
Device marking code			MBRL2045FCT
Repetitive Peak Reverse Voltage	V _{RRM}	V	45
Average Rectified Output Current @60Hz sine wave, R-load, T _a (FIG 1)	I _o	A	20
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25°C	I _{FSM}	A	180
Current Squared Time @1ms≤t≤8.3ms T _j =25°C, rating of per diode	I ² t	A ² s	134
Storage Temperature	T _{stg}	°C	-55 ~ +150
Junction Temperature	T _j	°C	-55 ~ +150

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRL2045FCT
Maximum instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =10.0A	0.55
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	V _{RM} =V _{RRM} T _a =25°C	0.2
	I _{RRM2}		V _{RM} =V _{RRM} T _a =100°C	50

■Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRL2045FCT
Thermal Resistance Between junction and case	R _{θj-c}	°C/W	4.0



MBRL2045FCT-B1-W5038HF

Ordering Information (Example)

PREFERRED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBRL2045FCT	Approximate 1.6	50	1000	5000	Tube

Characteristics (Typical)

FIG1:Io -Tc Curve

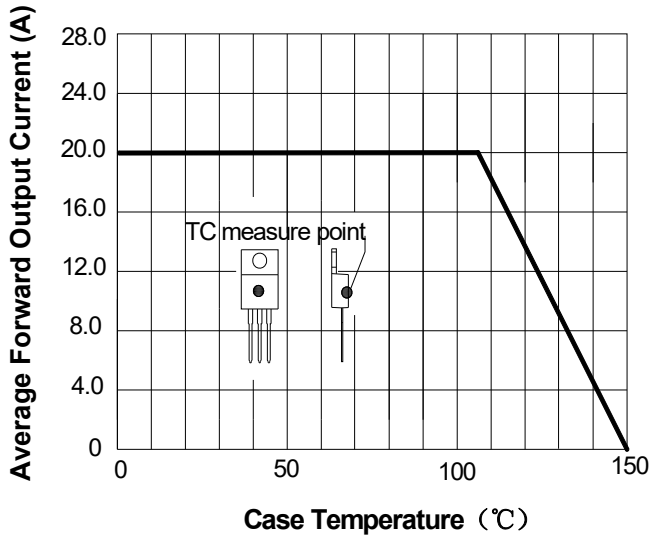


FIG2: Surge Forward Current Capability

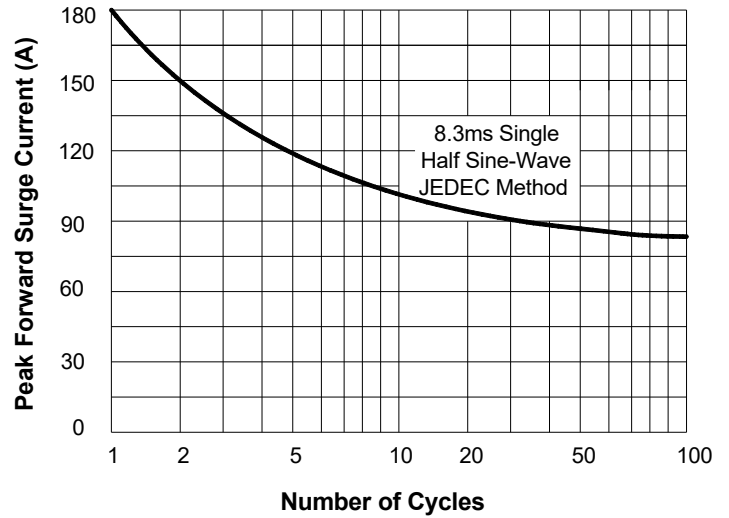


FIG3: Forward Voltage


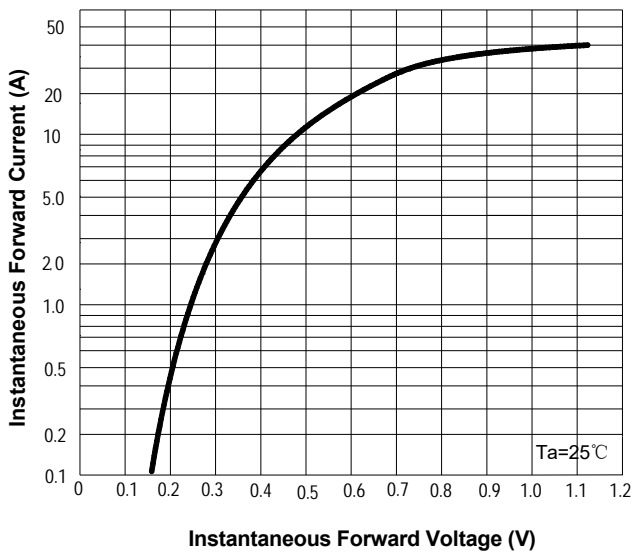



FIG4: Typical Reverse Characteristics



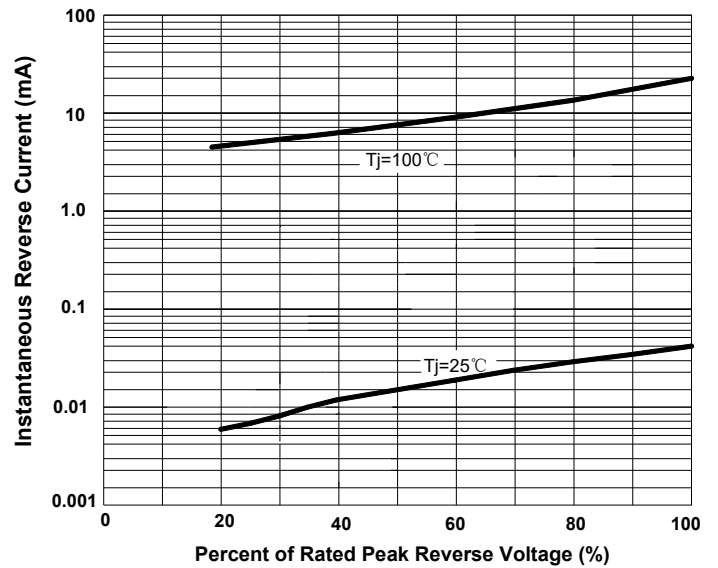

MBRL2045FCT-B1-W5038HF

■Outline Dimensions

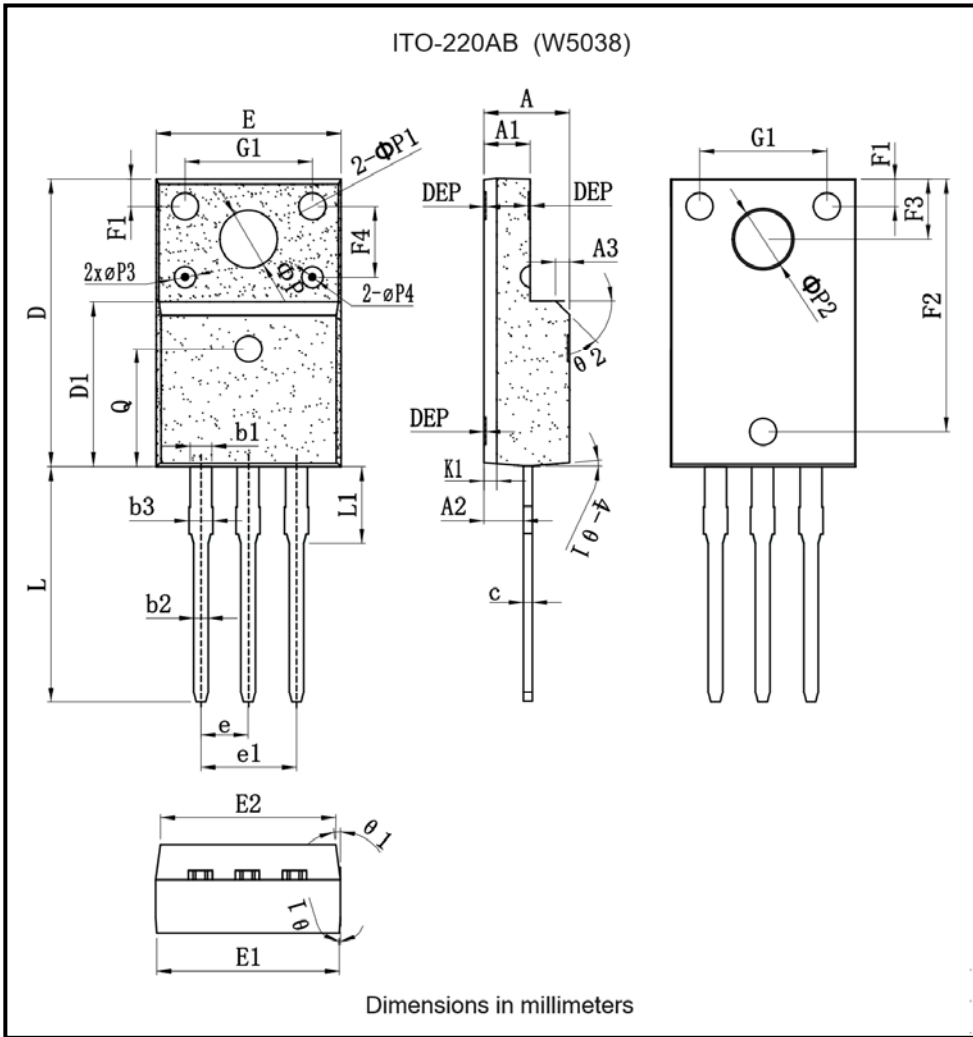

ITO-220AB (W5038)		
Dim	Min	Max
A	4.50	4.90
A1	2.34	2.74
A2	2.66	2.86
A3	1.0 REF	
b1	1.18	1.24
b2	0.75	0.85
b3	1.22	1.38
C	0.45	0.55
D	15.67	16.07
D1	9.04	9.20
e	2.50	2.58
e1	5.08 REF	
E	10.00	10.30
E1	9.94	10.20
E2	9.40	9.60
F1	1.40	1.60
F2	13.80	14.00
F3	3.20	3.40
F4	3.70	4.10
G1	6.90	7.10
K1	0.65	0.75
L	12.78	13.18
L1	3.40	3.60
Q	6.50 REF	
ϕP	3.08	3.28
$\phi P1$	1.45	1.65
$\phi P2$	3.30	3.50
$\phi P3$	0.95	1.35
$\phi P4$	0.25	0.35
$\theta 1$	3°	7°
$\theta 2$	42°	48°
DEP	0.05	0.15



MBRL2045FCT-B1-W5038HF

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.